

Sensor-switched indoor light

RS PRO P1 S

V2 warm white

EAN 4007841 056063

Article number 056063



LED

30 years (Ø 4,5h / day)



high frequency sensor 360°



1 - 8 m



IP54



2 - 2000 lux



5 sec - 15 min



networkable cable



ideal max. 3.5 m



energy saving

5 years

manufacturer's warranty
[steinel-professional.de/garantie](https://www.steinel-professional.de/garantie)

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light . The RS PRO P1 S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. As many as ten lights can be interconnected by cable. Output: 9,4 W with 968 lm, 3000 K.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	9,4 W
Interconnection	Yes
Lichtstrom Gesamtprodukt	968 lm
Gesamtprodukt Effizienz	103 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °

Electronic scalability	Yes
Mechanical scalability	No
Continuous light	selectable, 4h
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	warm white
PU1, EAN	4007841056063


RS PRO P1 S

V2 warm white

EAN 4007841 056063

Article number 056063


Detection Zone

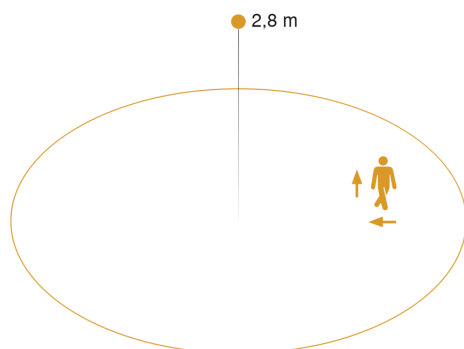


Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

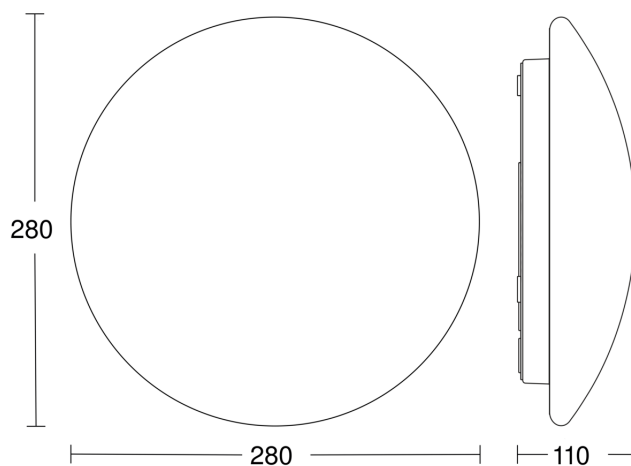


Light Distribution Curve



Output	9,4 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	968 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched indoor light

RS PRO P1 S

V2 warm white

EAN 4007841 056063

Article number 056063



Master/master interconnection circuit diagram

