
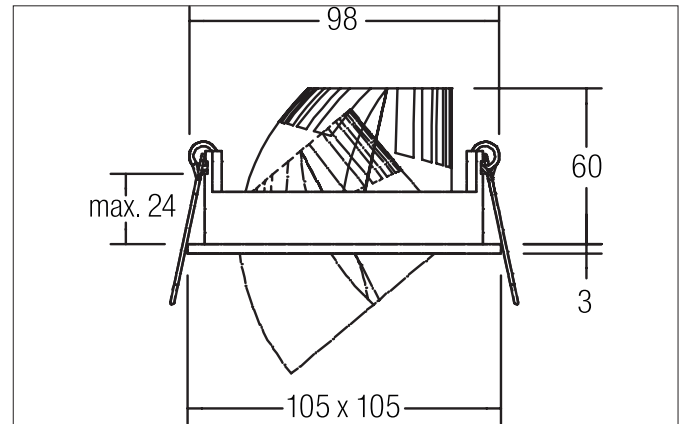


CIRCLE LED recessed spot CIRCLE, with all-round light gap

Artikel-Nr. 12418173

Licht.
Für Generationen.**Tender**

LED recessed spot CIRCLE, with all-round light gap, white, square. In a compact design, for installation in tool-less rapid assembly systems
 Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 500 mA, Power: 9.3W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 700lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 32°, Adjustability: Rotable and pivoted, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12418173
GTIN	4251433916048
Series name	CIRCLE
Kurzbeschreibung	LED recessed spot CIRCLE, with all-round light gap
Material	Aluminium / Plastic
Colour	White
Type of surface	Structure
Shape	square
Built-in diameter	98 mm
Installation depth	60 mm
Length	105 mm
Width	105 mm
weight	0.307 kg

CIRCLE LED recessed spot CIRCLE, with all-round light gap

Artikel-Nr. 12418173

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	700 lm
System efficiency	75 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	32 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	9.3 W
Voltage type	DC
Current	500 mA
Lamp	LED
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17613 17621 17640 17643 17657 17683 17648 17671 17672
Control	Other
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	40°
Rotation angle	350°
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent

Packing data	
Gross weight	0.409 kg
Length of packaging	145 mm
Packaging width	145 mm
Packaging height	85 mm

CIRCLE LED recessed spot CIRCLE, with all-round light gap

Artikel-Nr. 12418173

Licht.
Für Generationen.

Accessories	
	Artikel-Nr.: 17613000 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 15 W Abmessung: 115 mm x 34 mm x 19 mm
	Artikel-Nr.: 17621020 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 21 W Abmessung: 128 mm x 50 mm x 13 mm
	Artikel-Nr.: 17640020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 4,2 - 10 W Abmessung: 102 mm x 38 mm x 21 mm
	Artikel-Nr.: 17643020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 8,8 - 18 W Abmessung: 110 mm x 52 mm x 22 mm
	Artikel-Nr.: 17657000 Kurzbeschreibung: LED converter 350 mA, 1-10 V dimmable (analog) Leistung: 5,2 - 18 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17683020 Kurzbeschreibung: LED converter 350 mA, DALI dimmable (digital) Leistung: 3,5 - 17 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17648020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 0,7 - 17 W Abmessung: 166 mm x 46 mm x 34 mm
	Artikel-Nr.: 17671020 Kurzbeschreibung: LED converter 350mA, ZigBee dimmable Leistung: 3,5 - 18,5 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17672020 Kurzbeschreibung: LED converter 350mA, Casambi dimmable Leistung: 3,5 - 18 W Abmessung: 146.5 mm x 44 mm x 30 mm