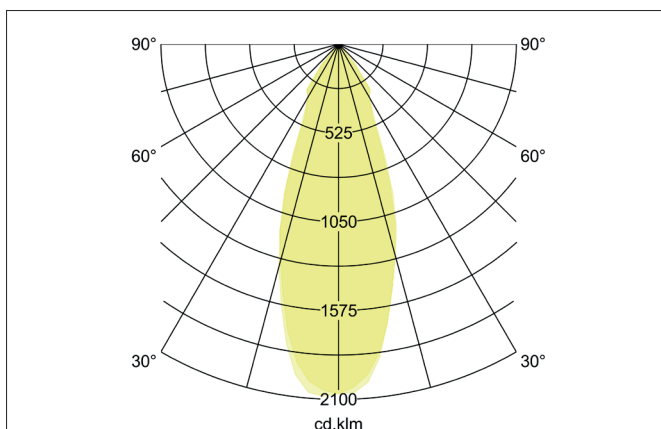
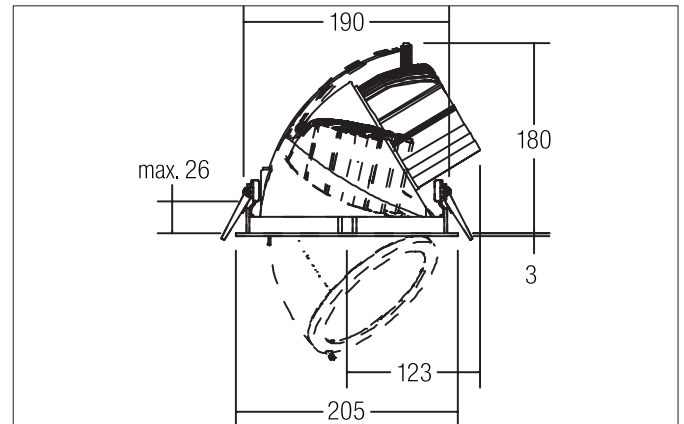


CORE LED recessed spotlight CORE

Artikel-Nr. 88677184

Licht.
Für Generationen.**Tender**

Runder LED-Einbauleuchte, Deckenausschnitt Ø 190 mm, Einbautiefe 180 mm, Außendurchmesser 205 mm, Gewicht 1,696 kg, mit rotationssymmetrisch tief-breit-strahlender Lichtstärkeverteilung. Optimale Lichtverteilung durch eine Glas transparent Abdeckung. Bemessungslichtstrom 4.881 lm, Bemessungsleistung 1 x 48,9 W, Leuchten-Lichtausbeute 100 lm/W, Lichtfarbe neutralweiß, ähnlichste Farbtemperatur (CCT) 4.000 K, allgemeiner Farbwiedergabeindex CRI > 80, Gehäusewerkstoff: Aluminium / Glas, Farbe: schwarz, Zulässige Umgebungstemperatur (ta): -20 °C - +25 °C, Schutzklasse (EN 61140): II, Schutzart (DIN EN 60529): IP20. Mit elektronischem Betriebsgerät, schaltbar. Das Produkt erfüllt die grundlegenden Anforderungen der anwendbaren EU-Richtlinien und des Produktsicherheitsgesetzes und trägt die CE-Kennzeichnung.

Article data	
Artikel-Nr.	88677184
GTIN	4251433900245
Series name	CORE
Kurzbeschreibung	LED recessed spotlight CORE
Material	Aluminium / Glass
Colour	Black
Type of surface	Matt
Shape	round
Outer diameter	205 mm
Built-in diameter	190 mm
Installation depth	180 mm
weight	1.696 kg

CORE LED recessed spotlight CORE

Artikel-Nr. 88677184

Licht.
Für Generationen.

Lighting technology	
Colour temperature	4000 K
Light colour	White
Light output	Direct
Luminous flux	4,881 lm
System efficiency	100 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	48.9 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	on/off
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	45°
Rotation angle	350°
Further references	No cover with thermal insulation material
Material cover	Glass transparent

Packing data	
Gross weight	1.993 kg
Length of packaging	240 mm
Packaging width	195 mm
Packaging height	240 mm