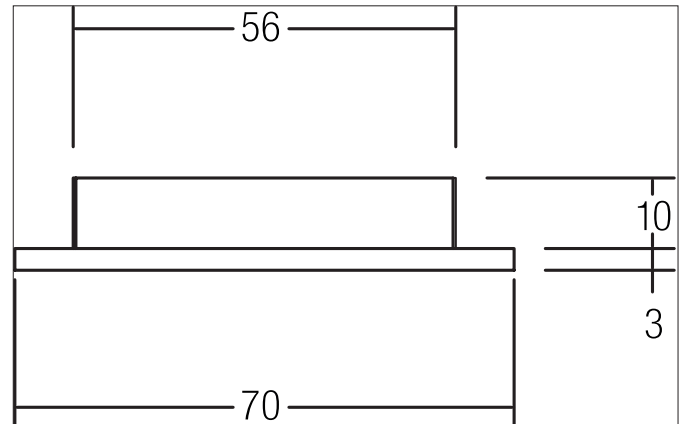
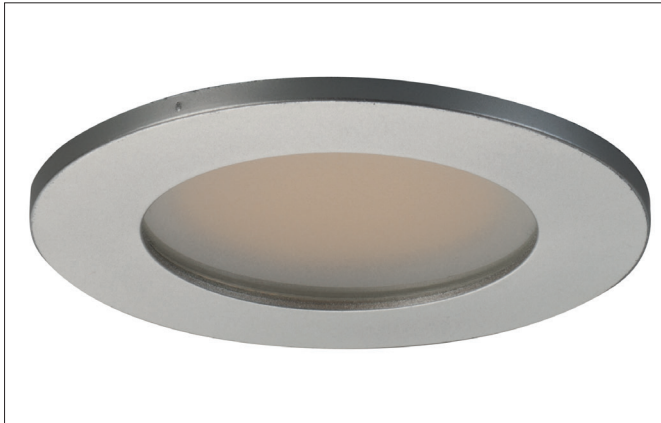


LED recessed downlight

Artikel-Nr. 12093263

Licht.
Für Generationen.**Tender**

LED recessed downlight, alu, round. In a compact design, for installation in tool-less rapid assembly systems. Lamp optimized for installation in furniture and wood-based materials. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Cast iron / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 3.5W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 275lm, Colour temperature: 3.200 K, Light colour : White, Beam angle: 120°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12093263
GTIN	4250047782667
Kurzbeschreibung	LED recessed downlight
Material	Plastic / Cast iron
Colour	Alu
Type of surface	Matt
Shape	round
Outer diameter	70 mm
Built-in diameter	56 mm
Installation depth	10 mm
Aufbauhöhe	3 mm
scope of delivery	Including 2,000 mm connecting cable
weight	0.135 kg

LED recessed downlight

Artikel-Nr. 12093263

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3200 K
Light colour	White
Light output	Direct
Luminous flux	275 lm
System efficiency	79 lm/W
Colour rendering	CRI 81
Reflector	Without
Beam angle	120 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	3.5 W
Voltage type	DC
DC nominal voltage max	12 V
Lamp	LED
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17106 17110
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
stamp	MM
Further references	No cover with thermal insulation material
Material cover	Plastic, structured

Packing data	
Gross weight	0.081 kg
Length of packaging	70 mm
Packaging width	47 mm
Packaging height	81 mm

Accessories	
	Artikel-Nr.: 17106000 Kurzbeschreibung: LED power supply 12 V DC, on/off Leistung: 1 - 15 W Abmessung: 105 mm x 49 mm x 18 mm
	Artikel-Nr.: 17110000 Kurzbeschreibung: LED power supply 12 V DC, on/off Leistung: 1 - 30 W Abmessung: 185 mm x 48 mm x 20 mm